



# TOKO 50 Watt AC-DC Converters

# MWE Series

**Input voltage range 85...264 V AC**  
**3 outputs 5/±12 V DC and 5/±15 V DC**  
**4300 V DC I/O electric strength test voltage**

- AC input jumper selectable
- Flex power topology
- Convection cooled
- High switching frequency (>100 kHz)
- State-of-the-art wireless transformer design
- Component derating for high reliability
- Noise standard, meets EN55011/55022

Safety according to IEC/EN 60950, UL 1950, CSA 950



MWE 50

## Summary

The MWE series strikes the right balance between size and performance right off the drawing board. These ultra compact switchers satisfy the design engineer's demand for less space without sacrificing power and efficiency. Very low profile of one inch is maintained on most models. Jumper selectable wide input range. The modules are UL 1950 (D3), CSA 950 and IEC/EN 60950 approved, meeting EN 55011/55022 noise standard.

## Key applications

Equipment for office automation, factory automation, peripheral, communication, security, display, test and measurement, inspection and medical.

## Type Survey and Key Data

Table 1: Type survey

Output 1 <sup>1</sup>		Output 2 <sup>1</sup>		Output 3 <sup>1</sup>		Input voltage $U_{I \text{ min}} \dots U_{I \text{ max}}$	Output power $T_A = 40^\circ\text{C}$ $P_{O \text{ tot}}$ [W]	Efficiency <sup>2</sup> $\eta$ [%]	Type designation
$U_{O \text{ nom}}$ [V DC]	$I_{O \text{ max}}$ [A]	$U_{O \text{ nom}}$ [V DC]	$I_{O \text{ max}}$ [A]	$U_{O \text{ nom}}$ [V DC]	$I_{O \text{ max}}$ [A]				
+5	8.0	+12	1.5	-12	1.0	85...132/ 170...264 V AC 47...63 Hz	51	65	MWE 50-01
+5	8.0	+15	1.5	-15	1.0		51	65	MWE 50-11
+5	8.0	+15	1.5	-5	1.0		51	65	MWE 50-21

<sup>1</sup> The cumulated power of all three or four outputs may not exceed the total rated power.

<sup>2</sup> Efficiency at  $U_{I \text{ rated}}$  and  $I_{O \text{ nom}}$ .

## Table of Contents

Summary .....	1	Electromagnetic Compatibility (EMC) .....	5
Type Survey and Key Data .....	1	Immunity to Environmental Conditions .....	6
Type Key .....	2	Mechanical Data .....	6
Functional Description .....	2	Safety and Installation Instructions .....	7
Electrical Input Data .....	2	Accessories .....	8
Electrical Output Data .....	3		

**Type Key**

**Type Key**

Series .....	MWE	_____	MWE 50 - 01
Nominal output power [W] .....	50	_____	
Output configuration .....	01...21	_____	

Example: MWE 50-01 = AC-DC converter providing 50 W on 3 outputs of 5 V/8 A, +12 V/1.5 A and -12 V/1 A.

**Functional Description**

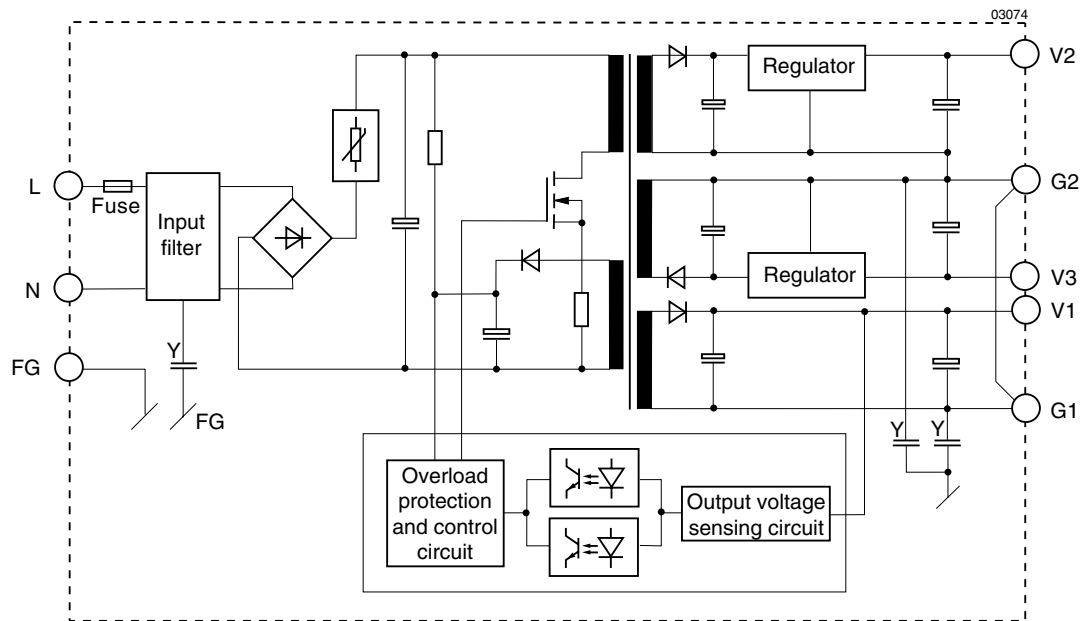


Fig. 1  
Block diagram MWE 50

**Electrical Input Data**

General Condition:  $T_A = 25^\circ\text{C}$  unless otherwise specified

Table 2: Input data

Characteristics		MWE 50-..	Unit
$U_{i \text{ Rated}}$	Rated input voltage	115, 120, 220, 230, 240	V AC
$U_i$	Input voltage range	85...132/170...264 <sup>1</sup>	
$f_i$	Line frequency	47...63	Hz
$I_i$	Input current <sup>2</sup>	115/230 V AC	A
$I_{i \text{ m}}$	Inrush current <sup>2</sup> (max.)	115 V AC	30
$I_{i \text{ leak}}$	Leakage current (max.)	115 V AC	0.5

<sup>1</sup> Jumper selectable.

<sup>2</sup> At  $U_{i \text{ rated}}$  and  $I_{o \text{ nom}}$ .

## Electrical Output Data

General Condition:  $T_A = 25^\circ\text{C}$  unless otherwise specified

Table 3: Output data 50 W types

Type		MWE 50-01			MWE 50-11			MWE 50-21			Unit	
Characteristics		V1	V2	V3	V1	V2	V3	V1	V2	V3		
$U_o$	Output voltage nom.	5	12	-12	5	15	-15	5	12	-5	V	
$\Delta U_o$	Voltage setting tolerance	$\pm 1$	$\pm 4$	$\pm 4$	$\pm 1$	$\pm 4$	$\pm 4$	$\pm 1$	$\pm 4$	$\pm 4$	%	
$I_{o\ set}$	Voltage setting load	3.25	0.7	0.5	3.25	0.7	0.5	3.25	0.7	0.5	A	
$U_{o\ P}$	Overvoltage protection	For V1 only, cut off at $\geq 7$ V, recovery at power on										
$I_o$	Output current	min.	1.5	0	0	1.5	0	0	1.5	0	0	A
		typ.	6.6	1	0.5	5.7	1	0.5	6.8	1	0.5	
		max.	8	1.5	1	8	1.5	1	8	1.5	1	
$I_{o\ L}$	Output current limitation <sup>2</sup>	105									%	
$P_{o\ tot}$	Total rated output max.	51									W	
$P_{o\ max}$	Output power	40	18	12	40	22	15	40	18	5		
$u_o$	Ripple-noise <sup>1</sup> max.	120	200	200	120	200	200	120	200	200		
$\Delta U_{o\ U}$	Line regulation max. 85...132 V/170...264 V	$\pm 1.0$	$\pm 0.5$	$\pm 0.5$	$\pm 1.0$	$\pm 0.5$	$\pm 0.5$	$\pm 1.0$	$\pm 0.5$	$\pm 0.5$	%	
$\Delta U_{o\ I}$	Load regulation max. 0...100%	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$	$\pm 1.0$		
$\Delta U_{o\ t}$	Drift (t = 0.5...8 h) typ.	0.3										
$\alpha_{U_o}$	Change in temp., 0...50°C	$\pm 1$										
$t_{o\ r}$	Rise time <sup>1</sup> max.	100									ms	
$t_{o\ h\ min}$	Hold up time <sup>1</sup> 100/200 V AC	10/20										
$\eta$	Efficiency <sup>1</sup> typ.	65									%	

<sup>1</sup> At  $U_{i\ rated}$  and  $I_{o\ nom}$  and normal temperature

<sup>2</sup> Operating at approx. 105% of rated power, V1: fold-back, V2, V3: constant current method, automatic recovery

## Input and Output Terminals

Table 4: Input and output terminals

Terminal	Function	Explanation
L N	Input terminals	1. Connect to AC with sine wave of 47...63 Hz, 85...132 V AC/180...264 V AC, single phase 2. Use a double or triple core cable for an input line 3. Space the AC input line as far as possible from the DC output line
FG	Frame ground terminal	Connect with low impedance to ground line of equipment on which the power supply is mounted
V1	Output Terminal 1	Stabilized output of 5 V DC
V2	Output Terminal 2	Stabilized output of 12 or 15 V DC
V3	Output Terminal 3	Stabilized output of -12, -15, or -5 V DC
V4	Output Terminal 4	Stabilized output of -12 V DC
G1, G2	Ground Terminals	G1: ground terminal for V1, G2: ground terminal for V2, V3 and V4 G1 and G2 are internally interconnected

### Proper Method of Operation

To achieve the proper output voltage from each output channel, the load currents must be within the minimum-maximum ratings. If the load current is below the minimum, use a pre-load.

### Output Current Limitation

Each channel has its own built-in overload protection at above 105% of the rated currents. In the case of overloading, the circuit operates to eliminate the excess current. After removal of the overload the circuit automatically resets.

### Overvoltage Protection

The MWE 50 has an overvoltage sensing circuit built into their V1 output (5 V and 24 V).

### Inrush Current

All models feature inrush current limitation. The MWE 50 provide a power thermistor circuit. Switching the AC input on and off repeatedly in rapid succession (less than 2 minutes for models with thermistors and 10 seconds for models with thyristors) should be avoided. An appropriate AC switch for each model based on specifications should be provided.

### Series or Parallel Connection

The outputs cannot be operated in series or parallel with other sources.

### Thermal Considerations

The relation between the maximum allowed output power  $P_{O \text{ allowed}}$ , the temperature  $T_A$  of the surrounding air and the mounting method is given in the: *Installation Instruction*. The percentage rates apply if the AC-DC converter is located in free, quasi-stationary air (convection cooling).

The following figure shows the allowed output power of an AC-DC converter.

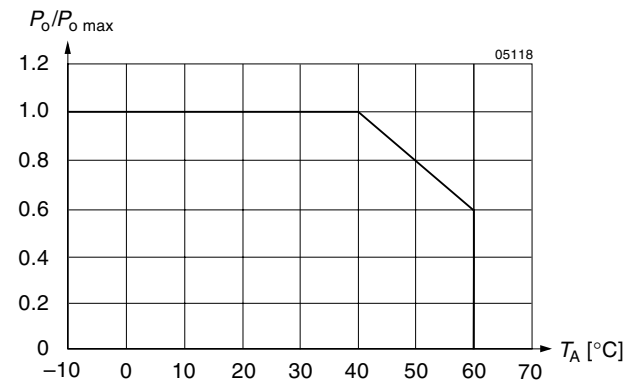


Fig. 2

Maximum allowed output power vs. ambient temperature

For  $P_{o \text{ max}}$  values see: *Type Survey and Key Data*. The thermal conditions are influenced by input voltage, output current, airflow and temperature of surrounding components and surface.

**Caution:** The installer must ensure that under all operating conditions  $T_A$  remains within the limits stated in the table.

## Electromagnetic Compatibility (EMC)

### Electromagnetic Immunity

A metal oxide VDR together with an input fuse and an input filter form an effective protection against high input transient voltages which typically occur in most installations,

but especially in battery driven mobile applications. The MWE series has been successfully tested to the following specifications:

Table 5: Immunity type tests

Phenomenon	Standard	Level	Coupling mode <sup>3</sup>	Value applied	Waveform	Source Imped.	Test procedure	In oper.	Per-form.
Electrostatic discharge	IEC/EN 61000-4-2	x	air discharge to frame	6000 V <sub>p</sub>	1/50 ns	330 Ω	10 positive and 10 negative discharges	yes	<sup>1</sup>
Electromagnetic field	IEC/EN 61000-4-3	x	antenna in 1 m distance	10 V/m	sine wave modulated w. 1 kHz		26...1000 MHz	yes	<sup>1</sup>
Electrical fast transient/burst	IEC/EN 61000-4-4	x	i/c, +i/-i	2000 V <sub>p</sub>	5/50 ns	50 Ω	1 min positive 1 min negative bursts per coupling mode	yes	<sup>1</sup>
Surge	IEC/EN 61000-4-5	x	i/c	2000 V <sub>p</sub>	1.2/50 μs	12 Ω	5 pos. and 5 neg. surges per coupling mode	yes <sup>2</sup>	<sup>1</sup>

<sup>1</sup> Normal operation, no deviation from specifications.

<sup>2</sup> No load.

<sup>3</sup> i = input, o = output, c = case.

### Electromagnetic Emissions

The disturbance voltage (quasi peak) at the input according to CISPR11/22 and EN 55011/22 for the MWE 50 is below level B (see following graph).

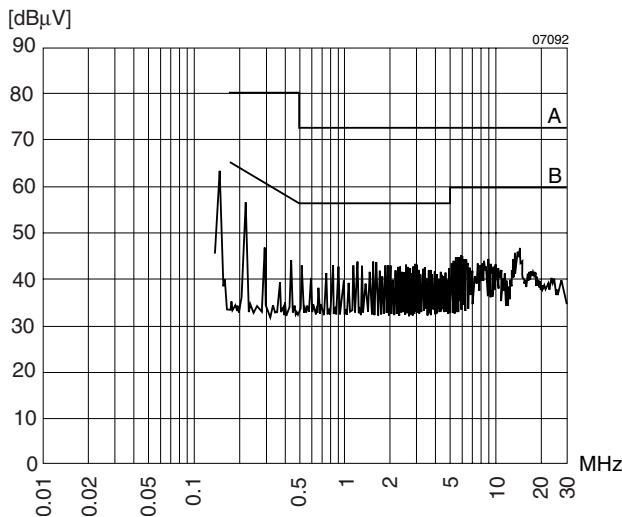


Fig. 3

The disturbance voltage (quasi peak) at the input according to CISPR11/22 and EN 55011/22, measured at  $U_{i rated}$  and  $I_{o nom}$  for MWE 50-21.

### Immunity to Environmental Conditions

Table 6: Mechanical stress

Test		Parameters	
Ca	Humidity (no condensation)	Relative humidity:	30...85% Unit operating/storage
Ea	Shock	Acceleration: Bump duration: Number of bumps:	20 g <sub>n</sub> (196.2 m/s <sup>2</sup> ) 11 ±5 ms 18 (3 each direction) Unit not operating
Fc	Vibration	Frequency: Maximum vibration amplitude: Acceleration: Duration:	5...55 Hz 10 mm (5...10 Hz) 2 g <sub>n</sub> (19.6 m/s <sup>2</sup> , 10...55 Hz) 3 h (1 h each axis) Unit not operating

Table 7: Temperature specifications

Characteristic		Conditions	min	max	Unit
T <sub>A</sub>	Ambient temperature range without derating	U <sub>i min</sub> ...U <sub>i max</sub>	-10	40	°C
T <sub>A</sub>	Ambient temperature range with derating (see: Thermal Considerations)		-10	60	
T <sub>S</sub>	Storage temperature range	Not operational	-20	75	

Table 8: MTBF values

MTBF	Type	Ground Benign T <sub>C</sub> =25°C
According to MIL-HDBK-217D	MWE 50	94'000 h

### Mechanical Data

Dimensions in mm. Tolerances ±1 mm unless otherwise indicated.

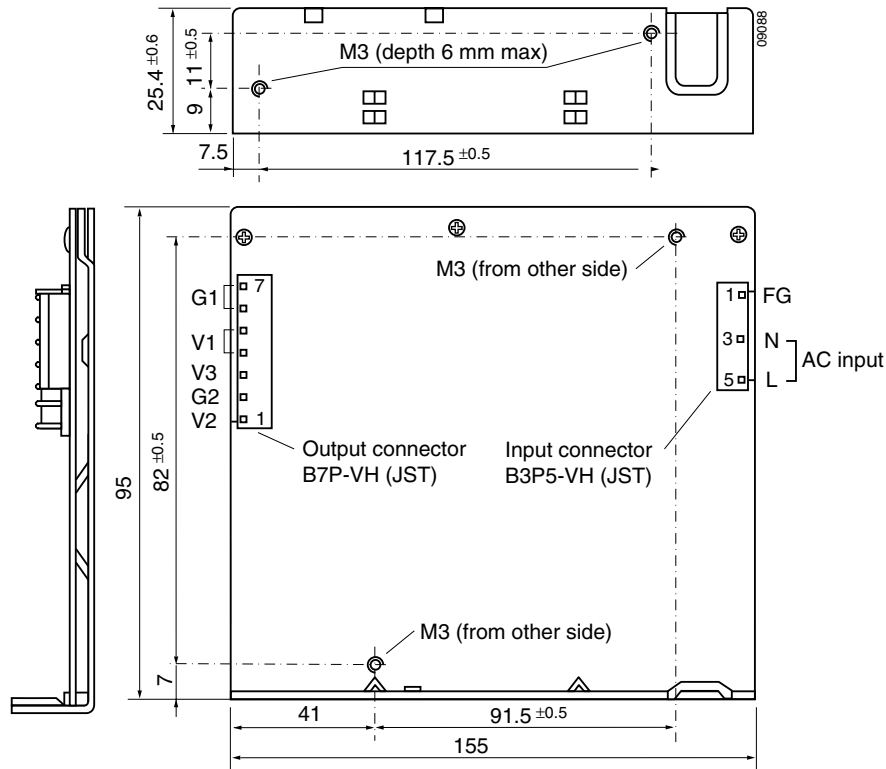


Fig. 4  
MWE 50, weight: 330 g

## Safety and Installation Instructions

### Installation Instructions

Our AC-DC converters are components, intended exclusively for inclusion within other equipment by an industrial assembly operation or by professional installers. Installation must strictly follow the national safety regulations in compliance with the enclosure, mounting, creepage, clearance, casualty, markings and segregation requirements of the end-use application. See also: *Technical Information: Installation and Application*.

Connection to the system shall be made via the terminal block at the rear side of the unit according to: *Terminal Assignment*.

For safety reasons it is essential to connect the FG and ACG terminals with protective earth. See also: *Safety of operator accessible output circuit*.

A fuse is built-in in the connection from the L terminal of the unit. Since this fuse is designed to protect the unit in case of an overcurrent and does not necessarily cover all customer needs, an external fuse suitable for the application and in compliance with the local requirements should be installed

in the wiring to the phase terminal L. A second fuse in the wiring to the neutral terminal N is needed if:

- Local requirements demand an individual fuse in each source line
- Neutral and earth impedance is high or undefined
- Phase and neutral of the mains are not defined or cannot be assigned to the corresponding terminals (L to phase and N to neutral)

**Important:** Do not open the modules, or guarantee will be invalidated.

Make sure that there is sufficient air flow possible for convection cooling. This should be verified by measuring the ambient temperature when the unit is installed and operated in the end-use application. The maximum specified ambient temperature  $T_{A\max}$  must not be overridden, depending on output power and mounting method. See: *Thermal Considerations* and table: *Allowed output power by mounting method*.

### Mounting Methods

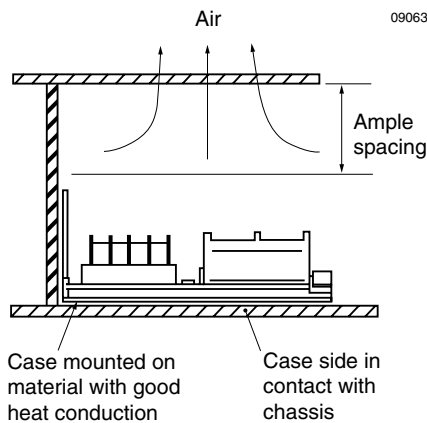


Fig. 5  
Horizontal mounting

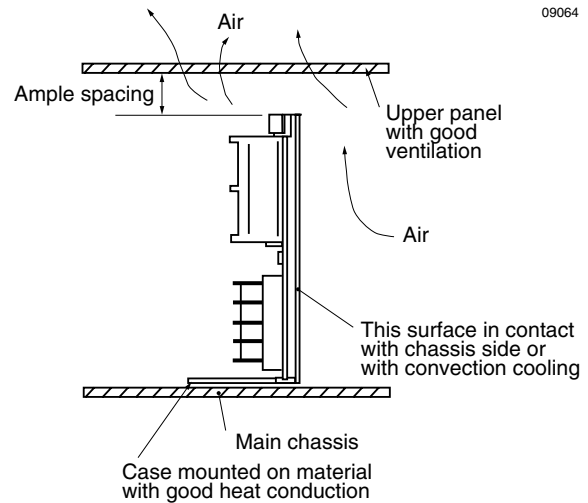


Fig. 6  
Vertical mounting

### Standards and approvals

The AC-DC converters correspond to class I equipment and are UL recognized according to UL 1950, UL recognized for Canada to CAN/CSA 950 and the MWE 50 also LGA approved to IEC/EN 60950 standards.

The units have been evaluated for:

- Building in,
- Basic insulation between input and frame and double or reinforced insulation between input and output, based on their maximum input voltage.
- Operational insulation between output and frame,
- The use in a pollution degree 2 environment,
- Connecting the input to an overvoltage category II circuit if >150 V or an overvoltage category III circuit if ≤150 V.

The AC-DC converters are subject to manufacturing surveillance in accordance with the above mentioned UL, CSA, EN and with ISO 9001 standards.

### Protection Degree

The protection degree of the AC-DC converters is IP 20, except in the vicinity of the terminal block, where it depends on the installation.

Table 9: Safety approvals

Types	UL	NRTL/C	CSA	LGA
MWE 50	-	UL 1950	CSA 950	IEC/EN 60950

**Isolation**

The electric strength test is performed as factory test in accordance with IEC/EN 60950 and UL 1950 and should not be repeated in the field. Power-One will not honour any guarantee claims resulting from electric strength field tests.

Table 10: Isolation

Characteristic	Input to frame	Input to output	Output to frame	Unit
Electric strength test voltage 1 s	-	3.0 <sup>1</sup>	-	kV <sub>rms</sub>
	-	4.3 <sup>1</sup>	-	kV DC
Insulation resist. at 500 V DC	-	>100	>100	MΩ
Leakage current	-	-	<15	mA

**Safety of operator accessible output circuit**

If the output circuit of an AC-DC converter is operator accessible, it shall be an SELV circuit according to the IEC/EN 60950 related safety standards

The following table shows a possible installation configuration, compliance with which causes the output circuit of the AC-DC converter to be an SELV circuit according to IEC/

EN 60950 up to a configured output voltage (sum of nominal voltages if in series or +/- configuration) of 44 V.

However, it is the sole responsibility of the installer to assure the compliance with the relevant and applicable safety regulations. More information is given in :*Technical Information: Safety*.

Table 11: Safety concept leading to an SELV output circuit

Conditions	AC-DC converter	Installation	Result
Supply voltage	Grade of isolation, provided by the AC-DC converter	Measures to achieve the resulting safety status of the output circuit	Safety status of the AC-DC converter output circuit
Mains ≤250 V AC	Double or reinforced	Earthed frame	SELV circuit

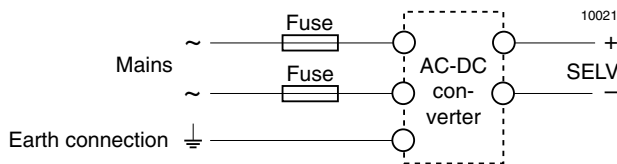


Fig. 7 Schematic safety concept Use fuses and earth connection as per: Installation Instructions and table: Safety concept leading to an SELV output circuit.

**Accessories**

**Connector Kits**

Table 12: Connector kit specification

Type	Connector kit designation	Input housing	Qty.	Contacts	Qty.	Output housing	Qty.	Contacts	Qty.
MWE 50	MLCK02	VHR-5N	1	SVH-21T-P1.1	3	VHR-7N	1	SVH-21T-P1.1	7

**Cable Kit**

Table 13: Cable kit (to be ordered separately from power supply)

Position at	Type of cable kit	Power supply	Material   Length Cross section	Wire color								
				V1	V2	V3	V4	G	AC (L)	AC (N)	FG	
AC input side	CB11	MWE 50	UL 1015   60 cm AWG 20 ≈ 0.50 mm <sup>2</sup>	-	-	-	-	-	-	Black (5)	White (3)	Green (1)
DC output side	CB13	MWE 50	UL 1007   60 cm AWG 18 ≈ 1 mm <sup>2</sup>	Red (4, 5)	Brown (1)	Blue (3)	-	Black (2, 6, 7)	-	-	-	